

Quartz Star

Quartz Star Upright Cabinet **Bottom Mounted**




Features:

- Designed for 43°C ambient environment (38°C glass door freezer models)
- Adjustable electronic controller with digital temperature display
- High efficiency, long life LED strip lighting (lights are optional on solid door models)
- 100% CFC free polyurethane foam for greater insulation properties and added strength
- Self contained cabinet with warm air from condenser blown up the face of door to reduce condensation.
- Bottom mounted removable cassette system
- Auto defrost utilising waste heat recovery vaporiser
- Optimised ducted air flow system
- Four adjustable plastic coated shelves/door
- Triple glazed doors for higher efficiency and reduced condensation
- Triple glazed heated glass door standard on all freezers
- Hermetic compressor

Model	QS1	QS2
Capacity	500 litres	900 litres
Finish: White Colorbond® interior and exterior with stainless steel internal floor*		
Refrigerator Glass Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	HQS1GDCB 160/3.8/620	HQS2GDCB 230/4.6/760
Refrigerator Solid Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	HQS1SDCB 160/3.8/620	HQS2SDCB 230/4.6/760
Freezer Glass Door -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	LQS1GDCB	LQS2GDCB
Freezer Solid Door -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	LQS1SDCB	LQS2SDCB
Finish: Stainless Steel interior and exterior*		
Refrigerator Glass Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	HQS1GDSS 160/3.8/620	HQS2GDSS 230/4.6/760
Refrigerator Solid Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	HQS1SDSS 160/3.8/620	HQS2SDSS 230/4.6/760
Freezer Glass Door -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	LQS1GDSS	LQS2GDSS
Freezer Solid Door -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	LQS1SDSS	LQS2SDSS

*Refer notes page 15

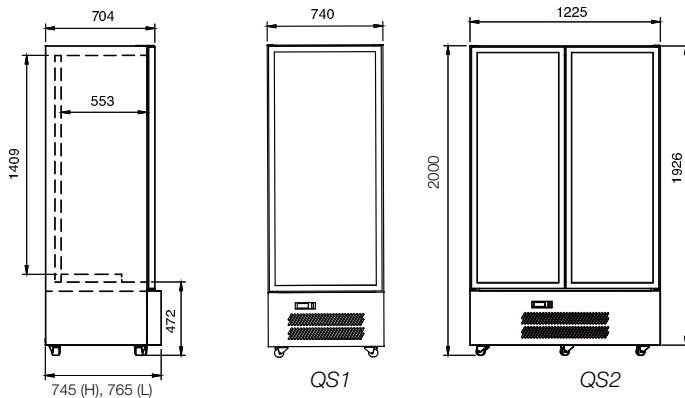

Options (see page 15):



Gas: Self-contained fridge R134a@-5C SST
 Self-contained freezer R404a@-30C SST
 Remote units R404a (others available)
 Electrical lead length 1.5m min. 240V 50Hz
 Heat rejection self-contained units: Fridge 1.4xWr, Freezer 1.6xWr